




PKA35/B compact Automatic Pay Station

1 INTENDED USE

Automatic Pay Station for the all-automatic determination and payment of parking fees based on barcode parking tickets. The payment takes place with coins or, as option, with banknotes or cashless means of payment like credit cards.

3 DIMENSIONS (MM)

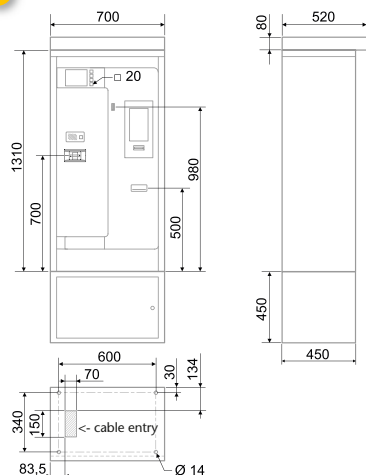

2 DEVICE VIEW



6,4" Colour Display

Multi-Language User Interface

Coin Processing "Compact"

Banknote Acceptance (Option)

Transponder Reader (Option)

Cashless Payment (Option)

4 TECHNICAL SPECIFICATIONS

Barcode Processing:

- Scanner "top" for reading in two directions (4 directions as option)
- Ticket feeder (presenter)
- Barcode printer for printing receipts and replacement tickets from a batch (leprello)

Coin Processing (Standard):

- Acceptance of up to 6 coin types
- 3 refilling coin stores for one coin type each
- Content: 300-600 coins per coin store depending on the size of the coins
- Issue of 3 different coin types
- Escrow function
- Self-locking coin box made of stainless steel, content 4,9 dm³ for approx. 4.000 coins

Coin Processing (Options):

- Coin stores for 2 coin types each (accepts a total of 6 coin types)
- Acceptance of token

Banknote Acceptors (Option):

- Type "JCM UBA"
 - Acceptance of 3 types of banknotes
 - Recognition rate min. 90 %
 - Stack box for 500 banknotes
- Type "Mars Cashflow"
 - Acceptance of max. 50 types of banknotes
 - Recognition rate max. 98 %
 - Stack box for 500 banknotes

Cashless Means of Payment (Option):

- Integration of various payment terminals possible
- further information on request

Housing:

- Weatherproof profile-shaped housing made of galvanized iron; stainless steel as option

Pedestal (Option):

- Pedestal with door made of galvanized iron or stainless steel

Standard Colours:

- Housing: RAL 1003 (Signal yellow)
- Front panel: RAL 7043 (Traffic grey B)

Display:

- Colour display (TFT, backlight)
- 6,4" (16,2 cm), VGA (640x480 pixels)

User guidance:

- via 4 menu-controlled function keys
- Cash tray with event-controlled illumination

Illuminated Tops (Option):

- Type "blank"
- Type "illuminated inscription"
- Type "light writing"

Other Extras (Selection):

- Special colours as desired
- Illuminated ticket slot
- Transponder reader

Connections:

- Power Supply
- Network (LAN, LON)
- Intercom

Power Supply:

- 230 V / 50 Hz or 120 V / 60 Hz

Power Consumption (approx.):

- 140 VA to 180 VA (quiescent/working curr.)
- Additional 700 VA for heating/ventilation
- 18 VA for illuminated top

Place of Installation:

- for indoor use or protected outdoor use

Temperature Range:

- -20°C ... +50°C

Air Humidity:

- ±0 % ... 95 %

International Protection:

- IPX3

Weights (approx.):

- Pay Station: 220 kg
- Steel pedestal: 35 kg

Approvals and Conformity:

- CE